

Blast Report

C.O. Number: _____	Blast Time: <u>1:16 P.M.</u>	Blast Date: <u>2-16-17</u>
Customer Name: <u>WHITE ROCK Quarry</u>	Address: <u>18300 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: Marine Limestone Rock Specific Gravity 2.3 G/C.C.	Expected Vibration: <u>0.028</u>	
Location of Blast: <u>Section 8</u>	Blast GPS Points: <u>N 25° 56' 19.42" W 80° 22' 10.57"</u>	
Weather: <u>MOSTLY CLOUDY</u>	Temp: <u>77°F</u>	Wind from and Speed: <u>W 14 MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>Compliance Machine</u>	Distance: <u>5,280'</u>	Direction: <u>180°</u>
GPS Points: <u>N 25° 55' 27.83" W 80° 22' 10.57"</u>		

No. of Holes	Explosives		
Hole Diameter	Type	Pounds or Units	
<u>65</u>			
<u>4.5"</u>			
<u>84'</u>	Bulk		
No. of Powder Deck: <u>65</u>	Bulk	<u>RIOMIX A</u>	<u>36,075</u>
Sub Drilling: <u>NA</u>	Boosters	<u>ORANGE CAP (06SE16C2)</u>	<u>130</u>
Avg. Stem Height: <u>16'</u>	Boosters		
Burden: <u>17'</u>			
Spacing: <u>18'</u>		Total Pounds:	<u>36,205</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>40m</u>	<u>52</u>	<u>MY-16</u>
<u>Electronic</u>	<u>40m</u>	<u>13</u>	<u>SE-16</u>
<u>Electronic</u>	<u>15m</u>	<u>65</u>	<u>AP-16</u>

Delay or Type	Length	No. Used	Date Code
<u>Bus WIRE</u>	<u>402'</u>		

Cubic Yards in Shot: 61,880 Avg Pounds/Hole: 557 Holes/Delay: 1
 Max LBS/Delay: 557 Powder Factor: Pounds Per Cubic Yard: 0.58
 Scaled Distance Factor: 223.721 Type of Blasting Machine: Twist Battery

Blaster Name: John Rohrer Blaster Signature: [Signature]
 Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: EP15-000005
 Site Inspection Performed: Yes Mine Management Signature: [Signature]


User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029



Comments:

Blank area for comments.

Shot Design

Holes Per Row: 13 Number Of Rows: 5 Arrows for North and POI: 
 Delay Time Holes in a Row: 24ms Delay Time Between Rows: 104ms

Typical Hole

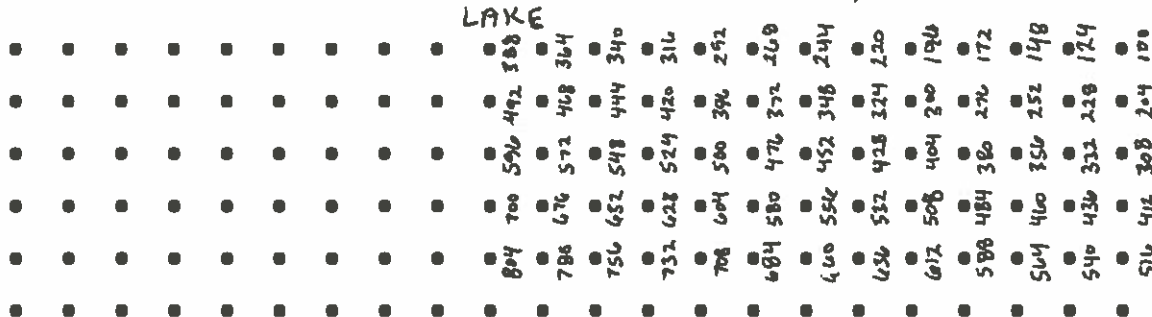

Staggered or Squared (Circle One)

Blast # 2017-4