

Blast Report

C.O. Number: _____	Blast Time: <u>1:16 P.M.</u>	Blast Date: <u>3-7-17</u>
Customer Name: <u>WHITE ROCK QUARRY</u>	Address: <u>18300 NW 122nd Aven Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.022</u>	
Location of Blast: <u>Section 8</u>	Blast GPS Points: <u>N 25° 56' 27.37" W 80° 22' 01.64"</u>	
Weather: <u>Mostly Cloudy</u>	Temp: <u>77°F</u>	Wind from and Speed: <u>E 16MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>Compliance 1: N 25° 55' 27.83" W 80° 22' 01.64"</u>	Distance: <u>(1) 6,072' (2) 6,072'</u>	Direction: <u>(1) 180° (2) 180°</u>
GPS Points: <u>Compliance 2: N 25° 56' 54.12" W 80° 21' 00.22"</u>		

No. of Holes	Hole Diameter	Hole Depth	No. of Powder Deck	Sub Drilling	Avg. Stem Height	Burden	Spacing	Explosives Type	Pounds or Units
<u>65</u>	<u>4.5"</u>	<u>84'</u>	<u>65</u>	<u>NA</u>	<u>16'</u>	<u>17'</u>	<u>18'</u>	<u>RIOMEX A</u>	<u>36,075 #</u>
								<u>ORANGE CAP (201416)</u>	<u>130</u>
									Total Pounds: <u>36,205</u>

Name of Detonator and Manufacture: Maxam Daveytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>30m</u>	<u>65</u>	<u>JA-16</u>
<u>Electronic</u>	<u>15m</u>	<u>65</u>	<u>AP-16</u>

Delay or Type	Length	No. Used	Date Code
<u>BLAS WIRE</u>	<u>602'</u>		

Cubic Yards in Shot: 61,880 Avg Pounds/Hole: 557 Holes/Delay: _____
 Max LBS/Delay: 557 Powder Factor: Pounds Per Cubic Yard: 0.58
 Scaled Distance Factor: 257.28 Type of Blasting Machine: Twist Battery

Blaster Name: John Rohrer Blaster Signature: [Signature]
 Blaster Address: 18870 NW 19th St. Pembroke Pines, FL 33029 Blaster No: EP15-000005
 Site Inspection Performed: Yes Mine Management Signature: [Signature]



User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029

Comments:

Shot Design

Holes Per Row: 13 Number Of Rows: 5 Arrows for North and POI: [Arrow] Typical Hole
 Delay Time Holes in a Row: 24ms Delay Time Between Rows: 104ms

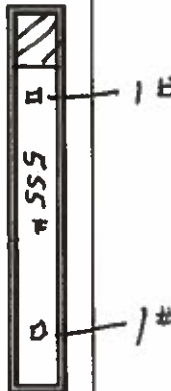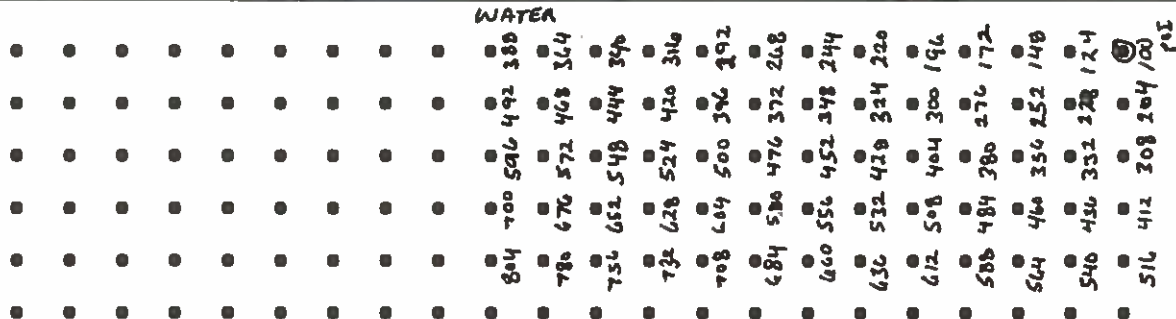

Staggered or Squared (Circle One)

Blast # 2017-9