

Blast Report

C.O. Number: _____	Blast Time: 3:00 P.M.	Blast Date: 8-7-17
Customer Name: WHITE ROCK QUARRY	Address: 18300 NW 122 nd Ave. Hialeah, FL	
Rock Type: Marine Limestone Rock Specific Gravity 2.3 G/C.C.	Expected Vibration: 0.092	
Location of Blast: Section 4-5	Blast GPS Points: N25°56'59.92"W 80°21'39.58"	
Weather: PARTLY CLOUDY	Temp: 93°F	Wind from and Speed: ESE 13 MPH

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: Compliance Machine	Distance: 2,692.8'	Direction: 0°
GPS Points: N25°57'21.30" W 80°21'39.7"		

No. of Holes	90	Explosives		
Hole Diameter	4.5"	Type		Pounds or Units
Hole Depth	84'	Bulk		
No. of Powder Deck	90	Bulk	REDIPIX A	49,950
Sub Drilling	NA	Boosters	ORANGE CAP (28MA17)	180
Avg. Stem Height	16'	Boosters		
Burden	17'			
Spacing	18'			
			Total Pounds	50,130

Name of Detonator and Manufacture: Maxam Daveytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
Electronic	15M	90	0C16
Electronic	30M	90	AP16


Delay or Type	Length	No. Used	Date Code
BUS WIRE	1100'		

Cubic Yards in Shot: 85.680 Avg Pounds/Hole: 557 Holes/Delay: 1/1
 Max LBS/Delay: 557 Powder Factor: Pounds Per Cubic Yard: 0.581
 Scaled Distance Factor: 114.098 Type of Blasting Machine: Twist Batted
 Blaster Name: John Rohrer Blaster Signature: *John Rohrer*
 Blaster Address: 9358 NW 47th St. Sunrise, FL 33351 Blaster No: _____
 Site Inspection Performed: Yes No Mine Management Signature: _____

User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029
 Comments: 9358 NW 47th St. Sunrise, FL 33351

Shot Design ↑ Typical Hole
 Holes Per Row: 18 Number Of Rows: 5 Arrpows for North and POI
 Delay Time Holes in a Row: 70 ms Delay Time Between Rows: 260 ms

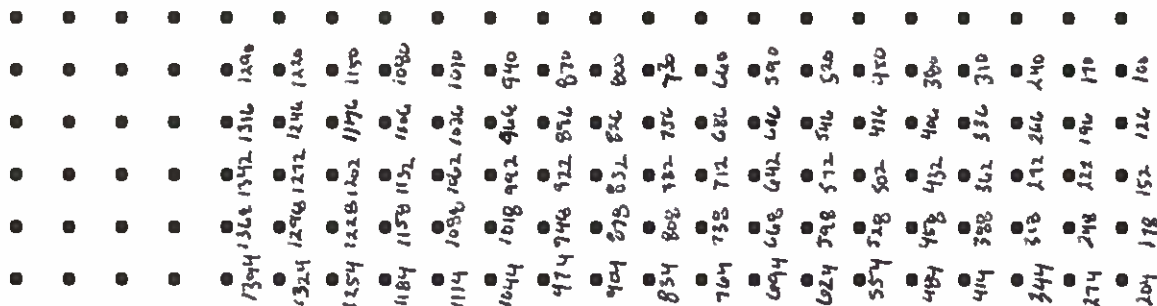

Staggered or Squared (Circle One)
 Blast # Section 4-5 (2017-5)

