

Blast Report

C.O. Number: _____	Blast Time: <u>1:15 P.M.</u>	Blast Date: <u>6-29-17</u>
Customer Name: <u>WHITE ROCK AWARRY</u>	Address: <u>18306 NW 122nd Ave. Hialeah, FL</u>	
Rock Type: <u>Marine Limestone Rock Specific Gravity 2.3 G/C.C.</u>	Expected Vibration: <u>0.045</u>	
Location of Blast: <u>Section 6</u>	Blast GPS Points: <u>N25°56'34.55" W80°23'06.79"</u>	
Weather: <u>MOSTLY CLOUDY</u>	Temp: <u>87°F</u>	Wind from and Speed: <u>ENE 7MPH</u>

Nearest Non-Owned Structure and Seismograph Location or Other Location

Name: <u>COMPLIANCE MACHINE</u>	Distance: <u>5,174.4'</u>	Direction: <u>0°</u>
GPS Points: <u>N25°57'25.80" W80°23'06.79"</u>		

No. of Holes	Hole Diameter	Hole Depth	No. of Powder Deck	Sub Drilling	Avg. Stem Height	Burden	Spacing	Explosives Type	Pounds or Units
<u>36</u>	<u>6"</u>	<u>84</u>	<u>36</u>	<u>NA</u>	<u>16'</u>	<u>21.5'</u>	<u>20'</u>	<u>RIOMEX A</u>	<u>35,424</u>
								<u>BOOSTERS</u>	<u>72</u>
								<u>ORANGE CAP (182A17)</u>	<u>72</u>
									<u>72</u>
								Total Pounds	<u>35,496</u>

Name of Detonator and Manufacture: Maxam Raytronics Other: _____
 Circle Choice: Non-electric Electric Electronic

Delay or Type	Length	No. Used	Date Code
<u>Electronic</u>	<u>30m</u>	<u>36</u>	<u>FE-16</u>
<u>Electronic</u>	<u>25m</u>	<u>36</u>	<u>AP-16</u>

Delay or Type	Length	No. Used	Date Code
<u>BUSWIRE</u>	<u>580'</u>		

Cubic Yards in Shot: 48,160.000 Avg Pounds/Hole: 986 Holes/Delay: 111
 Max LBS/Delay: 986 Powder Factor: Pounds Per Cubic Yard: 0.735
 Scaled Distance Factor: 164.786 Type of Blasting Machine: Twist Battery
 Blaster Name: John Rohrer Blaster Signature: [Signature]
 Blaster Address: 9358 NW 47th St. Sunrise, FL 33351 Blaster No: EP15-000005
 Site Inspection Performed: (Yes) No Mine Management Signature: [Signature]



User's Information

Name: John Rohrer- user# EL15-000005 18870 NW 19th St. Pembroke Pines, FL 33029

Comments: Signature Hole has a 2 second delay from the rest of the shot

Shot Design

Holes Per Row: 12 Number Of Rows: 3 Arrpows for North and POI (Circle) Typical Hole
 Delay Time Holes in a Row: See Attachment Delay Time Between Rows: See Attachment

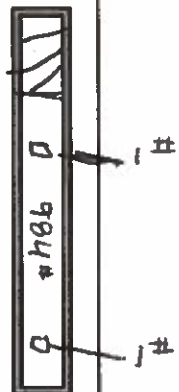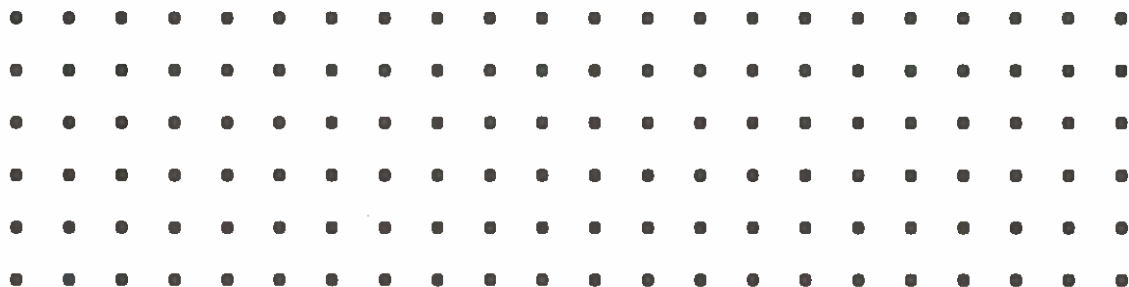

Staggered or Squared (Circle One)
 Blast # Section 6 2017-13



Water

880	802	724	646	568	490	412	334	256	178	126	100
958	906	828	750	672	594	516	438	360	282	204	152
3000	984	932	854	776	698	620	542	464	386	308	230

Signature Full Colum 6in.